

PRICE LIST

1 April 2019

Ductile Iron

Gate Valves & Hydrants

Resilient Seat Gate Valves



Manufactured and Independently certified by SAI Global to AS/NZS 2638.2.2002.

Ductile Iron body, with a Rilsan Nylon 11 coating to AS4158. Fully EPDM Encapsulated Resilient Seated Wedge, with Stainless Steel and Gunmetal internals. Available as Anti-clockwise Closing for Underground use, flanged to AS4087 Fig B5 (Table D) or socket ends, Series 1 or 2. Clockwise closing available for above ground use, supplied with handwheel, and flanged ends. Maximum working Pressure 16 Bar, Body Tested to 24 Bar.

| | CODE: | Size | Price |
|---------------------------------------|-----------|-------|-------|
| Anti-Clockwise Closing, | DISVF/050 | 50mm | |
| Double Flanged | DISVF/065 | 65mm | |
| | DISVF/080 | 80mm | |
| a a a a a a a a a a a a a a a a a a a | DISVF/100 | 100mm | |
| A | DISVF/125 | 125mm | |
| | DISVF/150 | 150mm | |
| | DISVF/200 | 200mm | |
| | DISVF/250 | 250mm | |
| | DISVF/300 | 300mm | |
| | DISVF/375 | 375mm | |
| | DISVF/450 | 450mm | |

| 5VF/45U | 450111111 | |
|-----------|-----------------|------------|
| *Larger s | sizes available | on request |

| | CODE: | Size | Price |
|--------------------|------------|-------|-------|
| Clockwise Closing, | DISVFH/050 | 50mm | |
| Double Flanged | DISVFH/065 | 65mm | |
| | DISVFH/080 | 80mm | |
| | DISVFH/100 | 100mm | |
| | DISVFH/125 | 125mm | |
| | DISVFH/150 | 150mm | |
| | DISVFH/200 | 200mm | |
| CE CO | DISVFH/250 | 250mm | |
| | DISVFH/300 | 300mm | |
| | DISVFH/375 | 375mm | |
| | DISVFH/450 | 450mm | |

*Larger sizes available on request

Service Gate Valves

50mm Nominal bore service valves are the ideal solution for rider main connections. Stainless Steel Stem, Ductile Iron body, Bronze Stuffing Box, and EPDM coated valve pad. Available in straight configuration, Female BSP or with Integral 63mm OD PE couplings, or right angle configuration, Male BSP x 63mm PE. Supplied complete with Ductile Iron Handwheel.


| | CODE: | Size | Price |
|------------------------|-----------------|-----------|-------|
| Female BSP Tee Type | DIHSVTT/050050 | 50mm | |
| Female PE Tee Type | DIHSVPLT/063063 | 63 x 63mm | |

| | CODE: | Size | Price |
|--------------------------------------------|----------------|-----------|-------|
| Female BSP Angle Type | DIHSVTA/050050 | 50mm | |
| Female PE / BSP DIHSVPLA/063063 Angle Type | | 63 x 50mm | |

Hydrant Valves

Manufactured and individually tested in accordance with BS 750, available in either squat or tall configuration. Bayonet style removable top cap enables in ground service and repair of stem seals. All fasteners and spindle are stainless steel, castings are Rilsan Nylon 11 to AS4158.

| | CODE: | Size | Price |
|----------------|-------|--------|-------|
| Medium Hydrant | DIFHM | medium | |
| | | | |

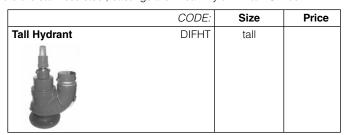

PRICES INDICATED DO NOT INCLUDE GST



Asmuss Plastic Systems Limited

FREEPHONE: 0800 000 546 Facsimile: (64) (9) 477 - 2328 sales@plasticsystems.co.nz

34 Arrenway Drive, North Shore City 0632

P.O. Box 100244, North Shore City 0745, Auckland, NZ











Pipe • Fittings • Valving • Measurement & Control www.plasticsystems.co.nz